

Dynapac CA5000D

Single drum vibratory rollers

Atlas Copco



Technical data

 Masses	
Operating mass (incl. ROPS)	35,280 lbs
Operating mass (incl. Cab)	35,700 lbs
Module mass (front/rear)	23,600/12,100 lbs
Max. operating mass	41,200 lbs

 Dimensions	
Drum width	84 in

 Propulsion	
Speed range	2-7 (mph)
Vertical oscillation	±9°
Tire size (12 ply)	23,1 x 26 AW
Theor. gradeability	56 %

 Compaction	
Static linear load	280 lbs/in
Nominal amplitude (high/low)	0.083/0.031 in
Vibration frequency (high/low amplitude)	1,740/1,800 vpm
Centrifugal force (high/low amplitude)	74,190/31,470 lb

 Engine	
Fuel tank capacity	72 gal

 Engine	
Manufacturer/Model	Deutz TCD6,1L06 (T4i)
Rated power, ISO 14396	129 kW (173 hp) @ 2,200 rpm

 Hydraulic system	
Driving	Hydrostatic
Vibration	Hydrostatic
Steering	Hydrostatic
Service brake	Hydrostatic in forward and reverse lever.
Parking/Emergency brake	Failsafe multidisc brake in drum gear box and in rear axle.

Find us locally at www.atlascopco.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.



rce_ca5000d_us-20140313.134029.pdf 2014-03-13 13:40

Dynapac CA5000D

Single drum vibratory rollers

Atlas Copco

Technical data

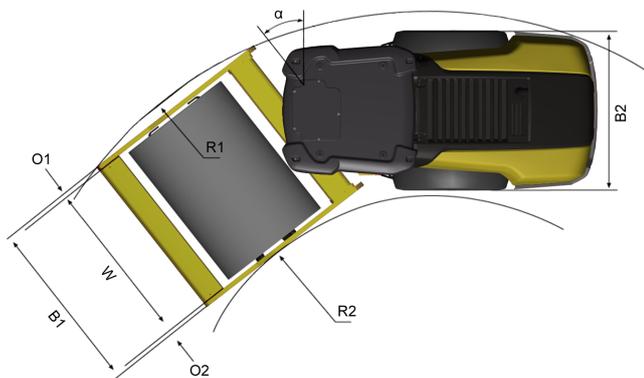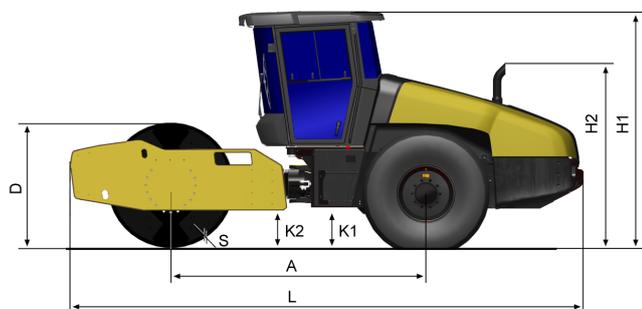

Dimensions

A. Wheelbase	122 in
B1. Width, front	92 in
B2. Width, rear	84 in
D. Drum diameter	60 in
H1. Height, with ROPS/cab	114 in
H2. Height, w/o ROPS/cab	84 in
K1. Ground clearance	18 in
K2. Curb clearance	18 in
L. Length	246 in
O1. Overhang, right	4 in
O2. Overhang, left	4 in
R1. Turning radius, outside	19 ft
R2. Turning radius, inside	11 ft
S. Drum shell thickness	1.69 in
W. Drum width	84 in
α. Steering angle	±38°



Standard equipment

- 24V outlet socket, operator's platform
- Automatic vibration control
- Back up alarm
- Brake release
- Cross Mounted Engine
- Combi cooler with Hydraulically driven fan
- Display: Engine temp, Fuel level, Hydr. temp, Speedometer, Tachometer, Voltage
- Dual speed drum drive motor
- Emergency stop
- Filler cap inside lockable hood
- Hydraulic checkpoints
- Parking brake
- Shock mounted platform
- Steering wheel, adjustable
- Suspension seat
- Storage Compartment
- Vandal cover
- Warning lights: Air cleaner, Brake, Clogged hyd. fluid filter, Engine oil pressure/temp, Hyd oil temp, Low charge, Low fuel
- 1m X 1m Visibility
- Zero spill oil & coolant change

Find us locally at www.atlascopco.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.