



AdvantageTM

**Series
Bottom
Dump**



AdvantageTM
SERIES

Advantage™

Series Bottom D



Full-Width Fenders,
both front and rear, are sloped to shed material more effectively.



Lightweight Crossbraces
tie the frame together in a way that minimizes the flexing and twisting that can cause cracking in critical stress areas.



Large Air Reservoir,
with air system oiler, means longer operating time and better control.



Oil-Impregnated Bronze Bushings
at gate pivot pins ensure smooth operation, long life and simplified replacement.



Large 11' 6" Clam
and 64" x 99" hopper opening, combined with nearly vertical hopper walls, delivers complete dumping of even the stickiest materials.



Adjustable 11-Position Gate Stop
is conveniently positioned on the side of the hopper so the gate setting can be adjusted without crawling under the trailer.

ump Trailer



One-Piece Unitized Design
of the hopper and frame provides optimum strength and maximum weight savings.




Full Oscillating Fifth Wheel Plate
features a spherical, chrome-bushed design that reduces wear and provides longer service life than a shaft and bushing design.



Other Features Include:



Pin-Style Landing Legs

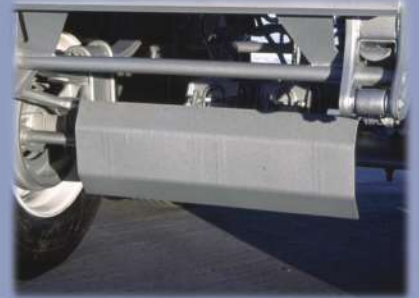

Aluminum Windrow Deflector



Optional Variable Gate Control



Chrome-Bushed Spherical Bearings
on the ends of the gate equalizer arms reduce wear and ensure long, trouble-free service life.



Two-Component Paint Finish
The entire trailer is primed and painted with a two-component polyurethane primer and paint, after which electrical lines are installed



Bolt-On Push Block
(also available with pintle hitch)

*Advantage*TM

Series Bottom Dump

Switch Gate Bottom Dump



Bottom Dump Trains

Quad Axle Bottom Dump





Specifications*

Model	BD22-402	BD22-362	BD22-403	BD22-433
Capacity	22 cu. yds.	22 cu. yds.	22 cu. yds.	22 cu. yds.
Overall length	39'10"	36'10"	39'10"	42'10"
Overall height	9'2"	9'2"	9'2"	9'2"
Overall width	102"	102"	102"	102"
KP to center last axle	36'	32'	36'	39'
Empty weight	12,600 lbs.	12,200 lbs.	14,600 lbs.	14,900 lbs.

Standard Equipment

- 22 cu. yd. hopper.
- 16 - 1/2" air brakes.
- 8.25 x 22.5 steel disc wheels (hub piloted).
- 11R 22.5 steel disc wheels (F).
- Oil seals.
- Multi-leaf spring suspension.
- 18" kingpin setting.
- Oscillating kingpin plate.
- 100,000/80,000 psi high yield steel unitized frame construction.
- 102" wide.
- Telescopic pin-type park stands.
- Bolt-on push block/bumper.
- Rubber-mounted sealed beam lights and sealed harness system.
- Mid-turn signal/clearance lights.
- 3rd tail light package.
- Electrical system per DOT regulations.
- 7-pole electrical socket.
- Red & white conspicuity markings.
- 8" air cylinders.
- Open/close gate control from cab-versa valve with handle.

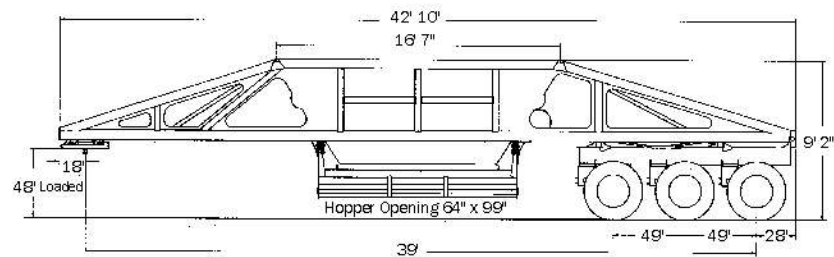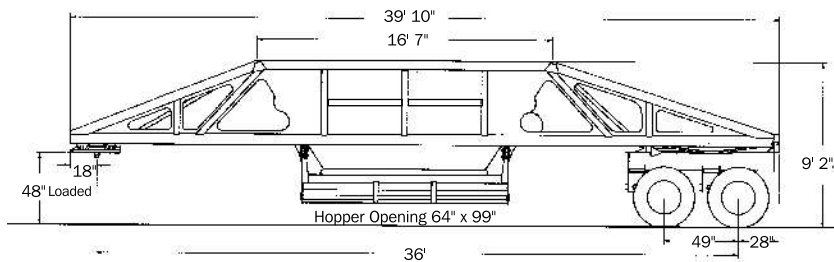

*All specifications are subject to change without notice. Trailers pictured in this brochure may feature optional equipment.

Distributed By:



TRAIL KING Industries

*Advantage*TM
SERIES