


## DIMENSIONS

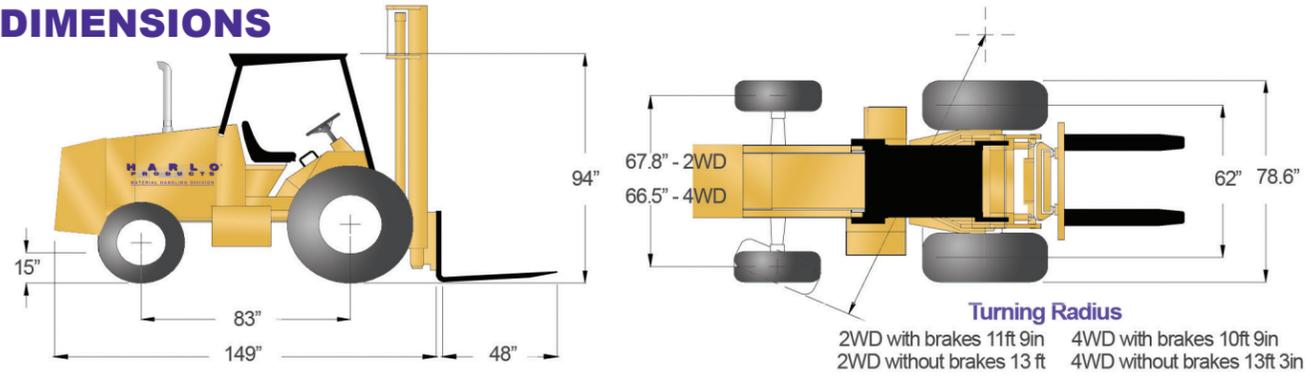

## MAST OPTIONS

Lift Height	Type	Available Carriage Width	Stage	Overall Lowered	Overall Extended	Capacity at 24" Load Center	2WD Weight	4WD Weight	Freelift
12' Roller	Notch ITA Class 2	48"   60"   72"   84"	2	113 in	183 in	5000lbs to 12'	11,697 lb	11,897 lb	None
14' Freelift	Notch ITA Class 2	48"   60"   72"	3	95 in	215 in	5000lbs to 14'	11,947 lb	12,147 lb	58"
12' Roller	Swing Carriage	48"	2	113 in	183 in	5000lbs to 12'	11,697 lb	11,897 lb	None

## SHOWN WITH OPTIONAL BIN CLAMP

Currently available for the HP5000 only, HARLO's industry exclusive integrated bin clamp is a bestseller. Helping you keep bins stabilized even on the roughest terrain, the bin clamp also reduces mast wear and tear, lessens operator fatigue and makes loading more efficient.



# HP5000

## PRODUCTIVITY.

The HP5000's compact design and industry leading turning radius will effortlessly navigate your work site. Engineered to optimize loading performance, the HP series has been designed to maximize lift and turn efficiency, providing superior maneuverability. **Eight different mast configurations** are available to match a variety of needs. The HP5000 is available with several industry focused optional features; including an **industry exclusive integrated bin clamp**. The HP5000 is most commonly found in agriculture applications; such as sod, citrus and vegetable harvesting.

