



Stockchaser



- Up to 9 mph max speed
- 67-inch turning radius
- Up to 5000 lb towing capacity*

THE STOCK TO DOCK PRODUCT SOLUTION



Note: Photos may be shown with optional equipment.

MODEL	SC-090-24	SC-100-24	SC-100-36	SC-100-48
VOLTAGE	24 Volt	24 Volt	36 Volt	48 Volt
SPEED	9 mph (14 km/h)	8 mph (13 km/h)	8 mph (13 km/h)	8 mph (13 km/h)
RANGE	20 mi (32 km)	20 mi (32 km)	30 mi (48 km)	40 mi (64 km)
LOAD CAPACITY	900 lb (408 kg)	1000 lb (454 kg)	1000 lb (454 kg)	1000 lb (454 kg)
TOW CAPACITY*	2000 lb (907 kg)	5000 lb (2268 kg)	5000 lb (2268 kg)	5000 lb (2268 kg)

* Based on Standard Configuration: Actual towing capacity is dependent on application, vehicle configuration, ballast weight, and operating environment.

Taylor-Dunn's Stockchaser is a cost effective solution to improve efficiency in any warehousing application. This unique narrow aisle, highly maneuverable vehicle provides an ergonomic advantage by quickly bringing the operator closer to stock when order picking.

Visit our website for additional images, information and view custom modifications at www.taylor-dunn.com.

FEATURES & BENEFITS:


- 24, 36 or 48 volt drive system
- 67-inch turning radius
- Zero emissions
- Regenerative braking (SC-100 only)
- 29.5 x 58 in. deck size
- Customizable to fit your application



Stockchaser


PERFORMANCE

LOAD CAPACITY lb (kg)	SC-090: 900 (408)	SC-100: 1000 (454)
MAX SPEED mph (km/h)	SC-090: 9 (14)	SC-100: 8 (13)
TOW CAPACITY lb (kg)	SC-090: 2000 (907)	SC-100: 5000 (2268)
TURNING RADIUS	67 in (170 cm)	

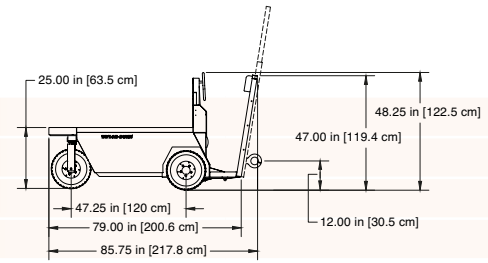

DIMENSIONS

OVERALL LENGTH	86 in (218 cm)
OVERALL WIDTH	29.5 in (75 cm)
HEIGHT	48 in (123 cm)
WHEEL BASE	47 in (120 cm)
DECK SIZE (W X L)	29.5 x 58 in (75 x 147 cm)
DECK HEIGHT	25 in (64 cm)

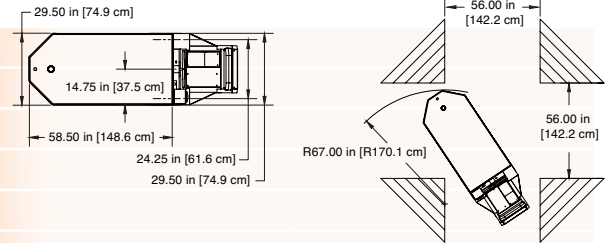

POWER SUPPLY / DRIVE TRAIN

MOTOR	SC-090 (Series) -24: 3.8 hp, SC-100 (Separately Excited) -24: 4.3 hp, -36: 6.6 hp, -48: 8.8 hp
SYSTEM VOLTAGE	24, 36, and 48 Volt
DRIVE AXLE	SC-090: Direct Gear Drive, SC-100: GT Automotive Type Differential
BATTERIES	210 Amp-hour, 6 Volt, Lead Acid
CHARGER	SC-090-24 & SC-100-24: Built-in, 600 Watt, 110 VAC Automatic w/ Interlock SC-100-36: Built-in, 1kW, w/ Interlock, SC-100-48: Built-in, 1kW, 60 Hz, w/ Interlock, 110 VAC
CONTROLLER	Solid State Speed Controller, Regenerative Braking

CHASSIS

FRAME	Fully Welded, Unitized, 16 Gauge, Diamond Plate Steel Body
STEERING	Manual, Chain Linkage, Front Fork, Clover Leaf Steering Wheel
SUSPENSION	Solid Mounted Rear Axle
BRAKES	Hand-Operated Parking Brake SC-090: Rear Drum, SC-100: Rear Disc
TIRES	4.80 x 8 Load Range B, Pneumatic



GT Automotive Drive (SC-100 only)

GENERAL

UNIT WEIGHT lb (kg)	SC-090: 760 (345)	SC-100-24: 970 (440)	SC-100-36: 1095 (497)	SC-100-48: 1195 (542)
OPERATOR COMFORT	Padded Backrest			
INSTRUMENTATION	SC-090: Battery Status Indicator, F-N-R Switch, Key Switch, Electric Horn SC-100: Smart View Display, F-N-R Switch, Reverse Alarm, DC/DC Converter, Electric Horn			
CONFORMANCE	Type E OSHA 1910.178, ANSI B56.8			

OPTIONS

- STROBE LIGHT
- HEADLIGHT/TAILLIGHT
- ROUND STEERING WHEEL
- KNEE PAD, COMFORT KIT
- HOUR METER (SC-90 only)
- 4, 5 OR 6 STEP LADDER
- DIAMOND PLATE DECK
- PORTABLE CHARGER
- STROBE LIGHT ON A POLE
- SOFT SOLID TIRES
- SOLID CUSHION TIRES
- DUAL FRONT FORK
- WIDER DECK
- CLIPBOARD HOLDER
- SECOND LEVEL DECK
- LIFT-OUT BATTERY BOX
- ROLL-OUT BATTERY BOX
- 225, 260 AMP-HOUR BATTERY
- VARIOUS HITCHES
- SMOOTH SKIN FRAME
- TIE DOWNS

Some options are limited to certain models, please consult your dealer. All factory customizations maintain OSHA compliance. Specifications, standard equipment, accessories and modifications are subject to change without notice.