

TOWMASTER

Rugged Electric Tow Tractors

MODEL	C4-10	C4-20
TYPE	Electric	Electric
SPEED (MAX MPH)	7 (11 km/h)	8 (13 km/h)
RANGE (MILES)	20 (32 km)	20 (32 km)
TOWING CAPACITY (lbs)	12,500 (5,670 kg)	20,000 (9,072 kg)
VOLTAGE	36	36
TURNING RADIUS (INCHES)	93" (236 cm)	100" (254 cm)

Based on Standard Configuration

*Typical capacity: Actual towing capacity depends on application and vehicle configuration



Tough and Dependable Product Solutions

The Taylor-Dunn® Towmaster, C4-10 & C4-20, electric tow tractors are material handling solutions that provide maneuverability, ruggedness, and reliability.

Maneuverability is achieved with a compact design incorporating a short wheel base and a 24:1 gear reduced automotive steering system, which allows for operation within tight quarters.

Towmaster's ruggedness begins with its all welded steel construction incorporating 1/4" thick panels riding on a leaf spring suspension. The power traction, oil bath chain, transmission with automotive differential, standard 4-wheel hydraulic brakes, and pneumatic tires make sure the Towmaster will start, stop, and ride with ease.

Equipped with DC Series wound motors, solid state speed controllers and accelerator modules, the Towmaster offers reliability and value in a tractor that can tow up to 20,000 lbs. at speeds of 8 mph.

With more than 150,000 vehicles in service and over 50 years experience in providing solutions to our customers, Taylor-Dunn® products are the best way to go about your business.

Vehicles may be shown with optional equipment



TAYLOR-DUNN®
Commercial and Industrial Vehicles Since 1949

The best way to go about your business

PERSONNEL CARRIERS



Aristocrat



Roadmaster

BURDEN CARRIERS



Taylortruck



Loadmaster



Model B Series



Electruck



Maintenance Expediter



Stepsaver



Stockchaser

TOW TRACTORS





Mule C4-10



Pullmaster

Model E

Huskey

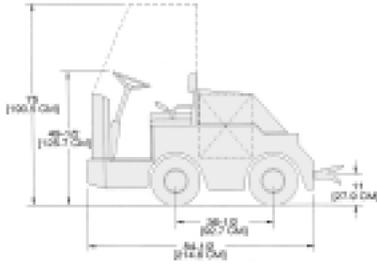

C4-20

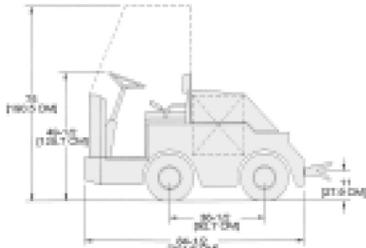

TOWMASTER STANDARD SPECIFICATIONS

Product Line	Model C4-10	Model C4-20
Unit Weight Lbs (Kgs)	1,150 (522 kg.) Without Battery	2,000 (907 kg.) Without Battery
Towing Capacity Lbs (Kgs)	12,500 (5670 kg.)	20,000 (9072 kg.)
Draw Bar Pull Lbs (Kgs)	275 Lbs. Normal, 1,700 Lbs. Ultimate (124 kg Normal, 771 Ult)	400 Lbs. Normal, 2,000 Lbs. Ultimate (181 kg Normal, 907 Ult)
Battery Compartment	19 3/4"L x 35 1/2"W x 23"H	19 3/4"L x 43 1/2"W x 23"H
Battery Weight Range	1,300 Lbs. to 1,650 Lbs.	1,300 Lbs. to 1,650 Lbs.
Battery Connector	SBX-175 (W/12 V Negative Tap)	SBX-175 (W/12 V Negative Tap)
System Voltage	36 Volt	36 Volt
Drive Axle	Automotive Type	Automotive Type
Motor	36V, 10HP (7.5 kw)	36V, 15HP (11.2 kw)
Speed	7 Mph (11 km/h)	9 Mph (13 km/h)
Gradeability	10% Unloaded, 5% Loaded	10% Unloaded, 5% Loaded
Tires	5.70 x 8 Load Range C	5.70 x 8 Load Range C
Brakes	Four Wheel Hydraulic Disc W/Hand Operated Parking Brake	Four Wheel Hydraulic Disc W/Hand Operated Parking Brake
Steering	Automotive Steering, 24:1	Automotive Steering, 24:1
Frame	All-Welded Unitized Steel Body and Frame, 1/4" Panels	All-Welded Unitized Steel Body and Frame, 1/4" Panels
Suspension	Leaf Spring Front And Rear	Leaf Spring Front And Rear
Controller	Solid-State Control	Solid-State Control
Light Accessories	Dual Headlights, Taillights and Stoplights	Dual Headlights, Taillights And Stoplights
Conformance Standards	Type E OSHA Requirements 1910.178, ANSI B56.9	Type E OSHA Requirements 1910.178, ANSI B56.9

Specifications based on standard vehicle configuration on smooth level surface with unit unloaded.

TOWMASTER OPTIONAL FEATURES

- Charger**
60 amp, 36 volts
- Battery**
425-680 a.h., 36 volts
- Accessories**
Windsheild Wipers
Mirrors
Turn Signals

- Hour Meter**
- Reverse Warning Alarm**
- Hitches**
Pintle Hitch
Automatic Coupling Hitch
Remote Hitch Release

- Cab**
Steel cab
Steel or vinyl doors
- Tires**
5.70x8 split rim, load range C
18x5x12 1/8 solid cushion tires



TAYLOR-DUNN CORPORATION

Commercial and Industrial Vehicles Since 1949



2114 West Ball Road, Anaheim, CA 92804 • (714) 956-4040 • FAX (714) 956-3130
Toll Free (800) 688-8680 Visit our website: www.taylor-dunn.com

Specifications, standard equipment, accessories and modifications subject to change without notice.