

# Dynapac CC800

## Double drum vibratory rollers

Atlas Copco



### Technical data



#### Masses

Max. operating mass	3,700 lbs
Operating mass (incl. ROPS)	3,400 lbs
Module mass (front/rear)	1,600/1,800 lbs



#### Propulsion

Speed range	0-6
Vertical oscillation	±13°
Theor. gradeability	40 %



#### Compaction

Centrifugal force	3,800 lb
Nominal amplitude	0.016 in
Static linear load (front/rear)	52/56 lbs/in
Vibration frequency	4,200 vpm
Water tank	30 gal



#### Engine

Manufacturer/Model	Perkins 403D-11
Type	Water cooled diesel
Rated power, SAE J1995	23.5 hp @ 2,600 rpm



#### Engine

Manufacturer/Model	Kubota D1105-E4B T4f
Type	Water cooled diesel
Rated power, SAE J1995	24 hp @ 2,800 rpm
Fuel tank capacity	6 gal



#### Hydraulic system

Driving	Axial piston pump with variable displacement and servo. 2 radial piston motors with constant displacement.
Vibration	Gear pump/motors with constant displacement.
Steering	Gear pump with constant displacement.
Service brake	Hydrostatic in forward and reverse lever.
Parking/Emergency brake	Failsafe brake in both drums.

Find us locally at [www.atlascopco.com](http://www.atlascopco.com)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.



rce\_cc800\_us-20140410.103811.pdf 2014-04-10 10:38

# Dynapac CC800

## Double drum vibratory rollers

Atlas Copco

### Technical data

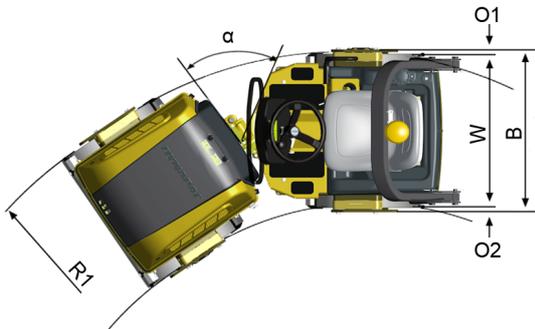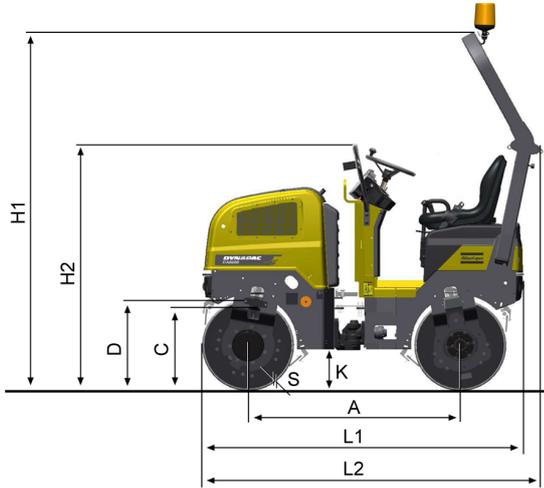

Dimensions	
A. Wheelbase	53 in
B. Width	34 in
C. Curb clearance	18 in
D. Drum diameter	23 in
H1. Height, with ROPS/cab	91 in
H2. Height, w/o ROPS/cab	62 in
K. Ground clearance	10 in
L1. Length	80 in
L2. Length (ROPS)	82 in
O1. Overhang, right	1 in
O2. Overhang, left	1 in
R1. Turning radius, outside	104 in
S. Drum shell thickness	0.6 in
W. Drum width	31 in
α. Steering angle	±34°



#### Standard equipment

Auto Vibration Ctrl (AVC), Auto Water Ctrl (AWC), Back up alarm, Central lifting eye, Cup/Can holder, Emergency stop, Foldable ROPS, Fuel gauge, Horn, Hourmeter, Hydraulic pressure checkpoints, Ignition key, Interlock brake, Pressurized sprinkler system, Rubber mounted operator's platform, Seat belt, Sprinkler timer, Towing eyelet front/rear, Vibrations both drums, Warning lights; Brake -Charging -Engine oil pressure/water temp -Low fuel

Find us locally at [www.atlascopco.com](http://www.atlascopco.com)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.

rce\_cc800\_us-20140410.103811.pdf 2014-04-10 10:38